

Sense 2m Stahlseile

Artikelnummer: 212170
 EAN: 7021982121708



Innen

Montage/Anschluss


Montage:

Größe

Länge (mm) L: 2000
 Gewicht (kg) brutto/netto: 0.17 / 0.1

Verpackung

Verpackungsmaße (mm): 100 x 100 x 150

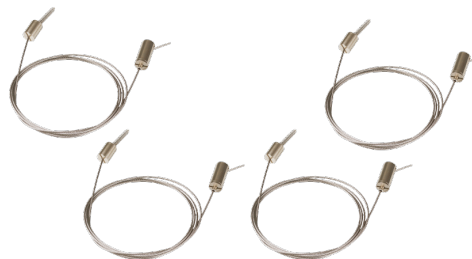

| Sense Panels & Driver Kits | | | | | | | | | |
|-----------------------------------|----------|-------------|--------|--|---|---|---|--|--|
| | CAI (Kx) | CAI (Steps) | BA (°) | SENSE 3000mm 1000ER 4E1 PHASE DIM (700mA) | SENSE 4000mm 2000ER 8E1 NON DIM (1400mA) | SENSE 5000mm 1000ER 4E1 NON DIM (1400mA) | SENSE 3000mm 1000ER 4E1 DALI (700mA) | SENSE 4000mm 2000ER 8E1 DALI (1400mA) | SENSE 5000mm 2000ER 8E1 DALI (1400mA) |
| SENSE OPAL 3-4000mm LED 3000K | 80 | 3 | 110 | 2750mm UGR<22 21W/128mW | 4000mm UGR<22 31.5W/127mW | * | 2750mm UGR<22 21W/128mW | 4000mm UGR<22 31.5W/127mW | * |
| SENSE OPAL 3-4000mm LED 4000K | 80 | 3 | 110 | 2650mm UGR<22 21W/133mW | 4000mm UGR<22 31.5W/130mW | * | 2750mm UGR<22 21W/133mW | 4000mm UGR<22 31.5W/130mW | * |
| SENSE OPAL 5000mm LED 3000K | 80 | 3 | 110 | 2650mm UGR<22 21W/133mW | 3900mm UGR<22 31.5W/128mW | 5000mm UGR<22 42W/121mW | 2850mm UGR<22 21W/126mW | 3900mm UGR<22 31.5W/127mW | 5000mm UGR<22 42W/118mW |
| SENSE OPAL 5000mm LED 4000K | 80 | 3 | 110 | 2750mm UGR<22 21W/128mW | 4000mm UGR<22 31.5W/127mW | 42W/121mW | 2750mm UGR<22 21W/131mW | 4000mm UGR<22 31.5W/127mW | 42W/121mW |
| SENSE PRISM 3-1000mm LED 3000K | 80 | 3 | 90 | 2650mm UGR<17 21W/126mW | 3750mm UGR<19 31.5W/124mW | * | 2650mm UGR<17 21W/126mW | 3750mm UGR<19 31.5W/123mW | * |
| SENSE PRISM 3-4000mm LED 4000K | 80 | 3 | 90 | 2750mm UGR<17 21W/131mW | 4000mm UGR<19 31.5W/129mW | * | 2750mm UGR<17 21W/131mW | 4000mm UGR<19 31.5W/128mW | * |
| SENSE PRISM 5000mm LED 3000K | 80 | 3 | 90 | 2650mm UGR<17 21W/130mW | 3750mm UGR<17 31.5W/119mW | 4000mm UGR<19 42W/110mW | 2650mm UGR<17 21W/126mW | 3750mm UGR<17 31.5W/118mW | 4000mm UGR<19 42W/118mW |
| SENSE PRISM 5000mm LED 4000K | 80 | 3 | 90 | 2750mm UGR<17 21W/131mW | 3750mm UGR<17 31.5W/118mW | 42W/110mW | 2750mm UGR<17 21W/131mW | 3750mm UGR<17 31.5W/118mW | 42W/118mW |

None efficiency calculations are incl. driver
 Incl. driver: 7-14%, loss depending on driver



7 0 2 1 9 8 2 1 2 1 7 0 8