

# Sense Line



## Sense Line 120x600 White Linect 1160lm 3000K Ra>80 Trailing edge dimming

Article code: 212690  
EAN: 7021982126901



### Electrical

System wattage: 9W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Light source included: Yes  
Luminous flux: 1160lm  
Efficacy: 129 lm/W  
Colour temperature: 3000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>100,000  
Light distribution: Direct  
Optic: Opalprism  
Beam angle: 84°  
UGR: UGR<19

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II SELV  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: B  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Recessed, Indoor  
Module: 120x600  
Connection: 3 pol Linect / screwless terminal block

### Dimensions

Length (mm) L: 595  
Width (mm) W: 118  
Height (mm) H: 35  
Ceiling void depth (mm): 35  
Weight (kg) gross/net: 1.1 / 0.9

### Packaging

Packing dimensions (mm): 750 x 135 x 54

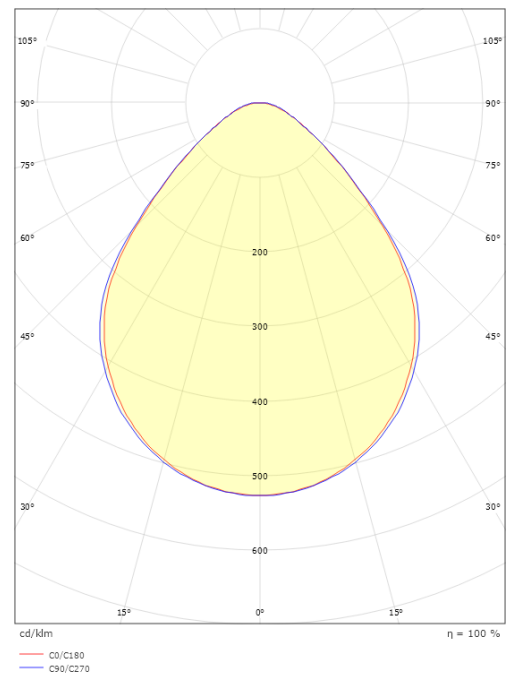

7 0 2 1 9 8 2 1 2 6 9 0 1