

# DiLED Iv



## DiLED Iv 595x595 White 4040lm 4000K Ra>80 DALI-2

Article code: 8246094827  
EAN: 5703821178457



• = This article is produced by order, with an expected delivery time of 3-4 weeks.



### Electrical

System wattage: 33W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 35, B16: 55, C10: 57, C16: 94

### Light technic

Type of light source: LED  
Luminous flux: 4040lm  
Efficacy: 122 lm/W  
Colour temperature: 4000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L85/B10100,000  
Light distribution: Direct  
Optic: Prism Optic  
UGR: UGR<19

### Control/Dimming

Type: DALI-2

### Protection

Luminaire class: Class II  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Sheet steel  
Colour: White smooth (Ral 9016 gloss 30)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Recessed, Indoor  
Module: 595x595 Exposed T-carrier 15/24mm  
Connection: 5 pol Linect / screwless terminal block

### Dimensions

Length (mm) L: 595  
Width (mm) W: 595  
Height (mm) H: 60  
Weight (kg) gross/net: 5 / 4.8

### Packaging

Packing dimensions (mm): 605 x 605 x 99

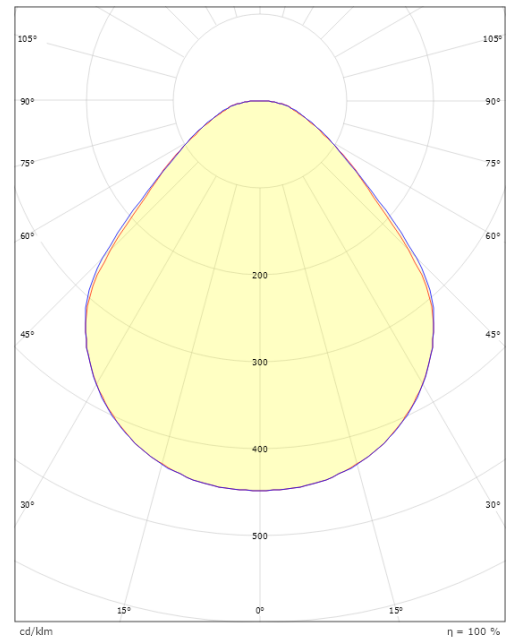

5 7 0 3 8 2 1 1 7 8 4 5 7