

# Farm 66



## Farm 66 1200 Grey 4030lm 4000K Ra>80 On/Off

Article code: 120009  
EAN: 7021981200091



### Electrical

System wattage: 34W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51  
Leakage current (mA): 0.08

### Light technic

Type of light source: LED  
Luminous flux: 4030lm  
Efficacy: 119 lm/W  
Colour temperature: 4000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B50>50,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct  
Optic: Opal  
UGR: UGR<28

### Control/Dimming

Type: On/Off

### Protection

Luminaire class: Class I  
IK Class: IK08  
IP Class: IP66  
Fire protection class: 850°C - 30s

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
Food Safety approved (IFS and HACCP): Yes

### Materials and finish

Housing: PC with ammonia-protection coating, end caps in ASA  
Colour: Grey  
Optics: Polycarbonat (PC)

### Mounting/Connection



Mounting: Surface, Indoor  
Module: 1200  
Connection: 5-pole screwless terminal block with 5x2,5mm<sup>2</sup> through wiring

### Dimensions

Length (mm) L: 1174  
Width (mm) W: 112  
Height (mm) H: 67  
Weight (kg) gross/net: 1.837 / 1.547

### Packaging

Packing dimensions (mm): 1180 x 114 x 71

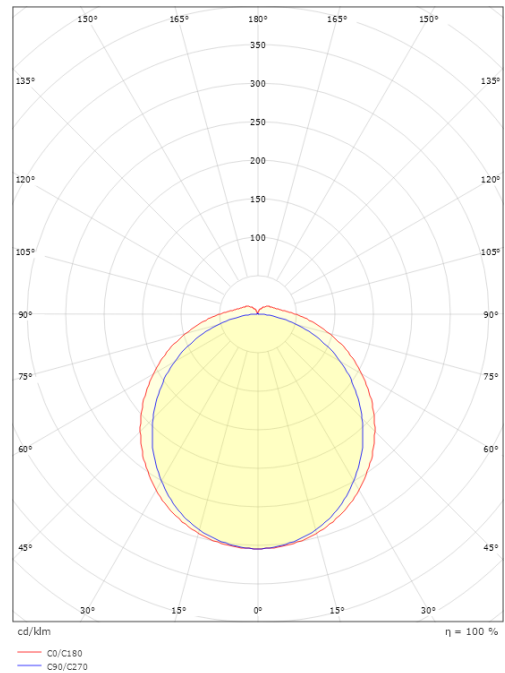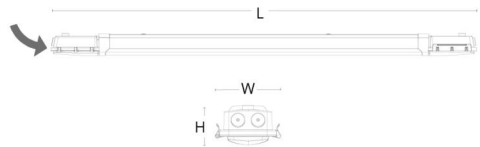

7 0 2 1 9 8 1 2 0 0 9 1