

Frame Round Wall



Frame Round Wall Graphite 390lm 3000K Ra>80 Trailing edge dimming

Article code: 605066
 EAN: 7021986050660




Electrical

System wattage: 7W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
 Luminous flux: 390lm
 Efficacy: 56 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B20>100,000
 Lifetime: L80/B20>75,000
 Light distribution: Direct
 Optic: Opal
 Beam angle: 110°
 Photobiological safety: RG 0

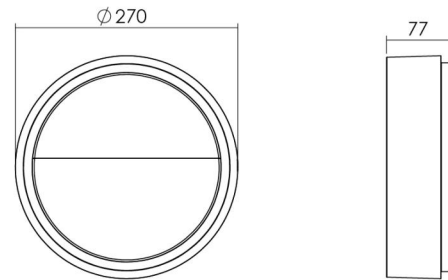

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 IK Class: IK10
 IP Class: IP66
 Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: UV-stabilized polycarbonate

Mounting/Connection


Mounting: Surface, Indoor / Outdoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 77
 Diameter (mm) D: 270
 Weight (kg) gross/net: 2.39 / 1.9

Packaging

Packing dimensions (mm): 278 x 275 x 92

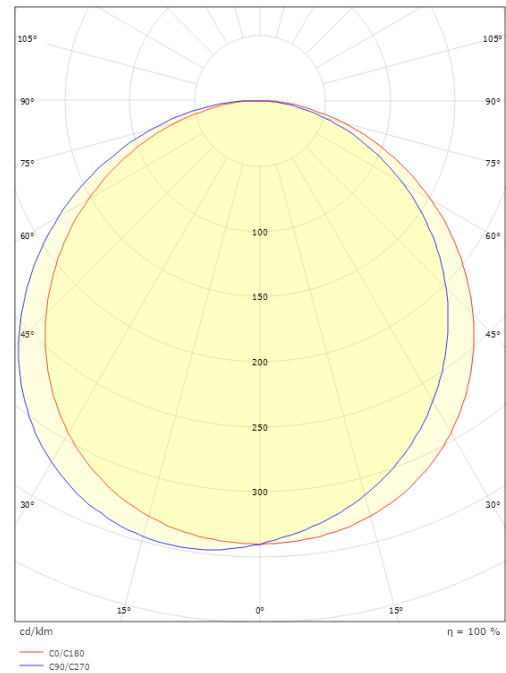

7 0 2 1 9 8 6 0 5 0 6 6 0