

# Frame Square



## Frame Square Graphite 630lm 3000K Ra>80 Trailing edge dimming

Article code: 605261  
 EAN: 7021986052619




### Electrical

System wattage: 7W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 77, B16: 123, C10: 77, C16: 123

### Light technic

Type of light source: LED  
 Luminous flux: 630lm  
 Efficacy: 90 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B20>100,000  
 Lifetime: L80/B20>75,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 110°  
 Photobiological safety: RG 0

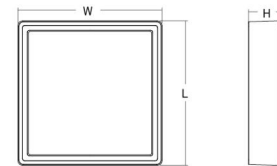

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II  
 IK Class: IK10  
 IP Class: IP66

### Energy and approvals

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Graphite  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection


Mounting: Surface, Indoor / Outdoor  
 Connection: Screwless terminal block

### Dimensions

Length (mm) L: 240  
 Width (mm) W: 240  
 Height (mm) H: 77  
 Weight (kg) gross/net: 2.47 / 2.1

### Packaging

Packing dimensions (mm): 248 x 248 x 92

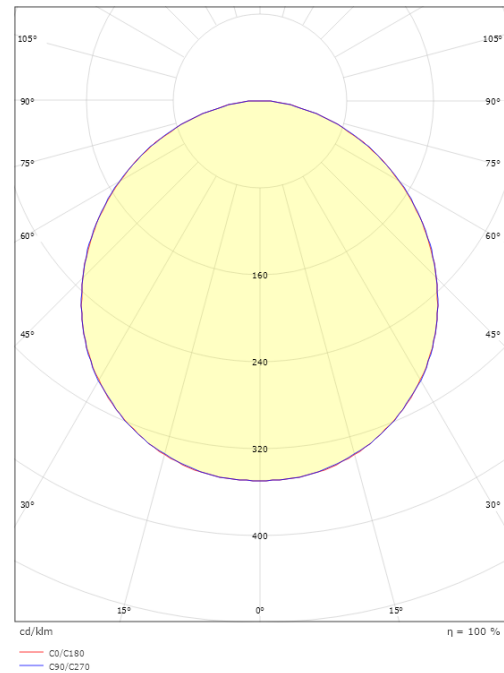

7 0 2 1 9 8 6 0 5 2 6 1 9