

Herning Wall



Herning Wall Grey Mini 580/620/1220/1300lm 3000/4000K Ra>80 Trailing edge dimming

Article code: 623961
EAN: 7021986239614



Electrical

Wattage: 8W/17W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 30, B16: 47, C10: 50, C16: 80

Light technic

Type of light source: LED
Luminous flux: 580/620/1220/1300lm
Efficacy: 73/78/72/76lm/W
Colour temperature: 3000/4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Glass
UGR: UGR<22/25
Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
IK Class: IK06
IP Class: IP65

Materials and finish

Housing: Aluminium
Colour: Grey RAL 7042

Mounting/Connection



Mounting: Wall, Indoor / Outdoor
Connection: Screwless terminal block
Wind projected area: 0,0275m²

Dimensions

Length (mm) L: 331
Width (mm) W: 182
Height (mm) H: 181
Weight (kg) gross/net: 2.262 / 1.74

Packaging

Packing dimensions (mm): 345 x 190 x 200

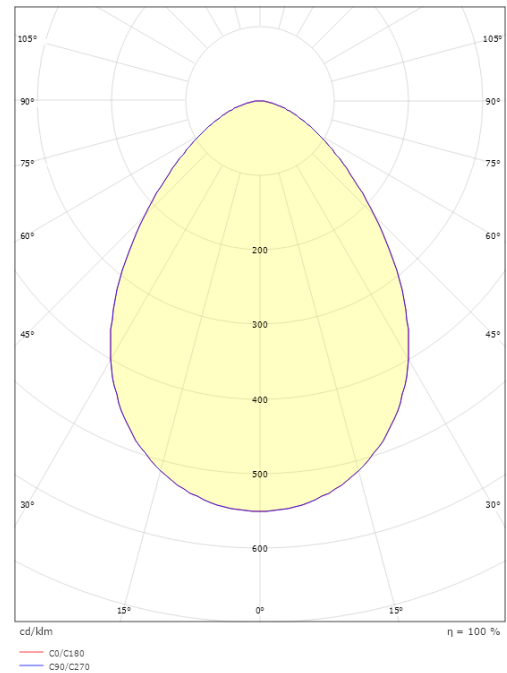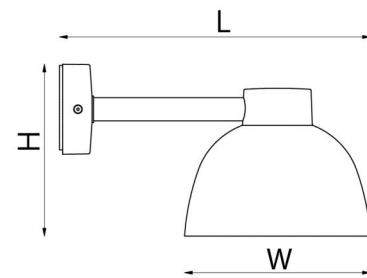

7 0 2 1 9 8 6 2 3 9 6 1 4