

Herning Wall



Herning Wall Grey Midi 1060/1140/1770/1920lm 3000/4000K Ra>80 Trailing edge dimming

Article code: 623963
 EAN: 7021986239638



Electrical

Wattage: 13W/25W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 23, B16: 36, C10: 37, C16: 60

Light technic

Type of light source: LED
 Luminous flux: 1060/1140/1770/1920lm
 Efficacy: 82/88/71/77lm/W
 Colour temperature: 3000/4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>50,000
 Light distribution: Direct
 Optic: Glass
 UGR: UGR<25
 Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 IK Class: IK06
 IP Class: IP65

Materials and finish

Housing: Aluminium
 Colour: Grey RAL 7042

Mounting/Connection



Mounting: Wall, Indoor / Outdoor
 Connection: Screwless terminal block
 Wind projected area: 0,0435m²

Dimensions

Length (mm) L: 402
 Width (mm) W: 240
 Height (mm) H: 222
 Weight (kg) gross/net: 3.354 / 2.62

Packaging

Packing dimensions (mm): 420 x 250 x 240

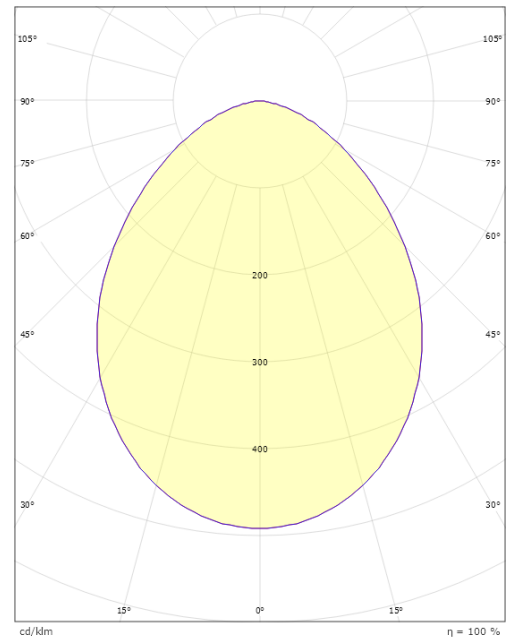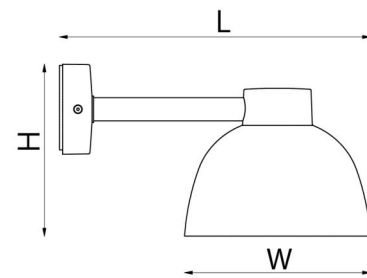

7 0 2 1 9 8 6 2 3 9 6 3 8