

# Junistar ECO Isosafe



## Junistar ECO Isosafe Black DimToWarm 470lm 2000-2800K Ra>95 Trailing edge dimming

Article code: 905217  
EAN: 7021989052173



### Electrical

Wattage: 6W  
System wattage: 7W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

### Light technic

Type of light source: LED  
Luminous flux: 470lm  
Efficacy: 67 lm/W  
Colour temperature: 2000-2800K  
Colour rendering (CRI): Ra>95  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>50,000  
Light distribution: Direct Reflector  
Optic: Reflector  
Beam angle: 42°  
UGR: UGR<22



### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II SELV

### Energy and approvals

Contains light source of energy class: F  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: Black (RAL 9004)  
Optics: Tempered glass

### Mounting/Connection



Mounting: Recessed, Indoor  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 40  
Diameter (mm) D: 90  
Cut-out (mm): 83  
Weight (kg) gross/net: 0.361 / 0.361

### Packaging

Packing dimensions (mm): 122 x 121 x 95  
Number per pack: 8

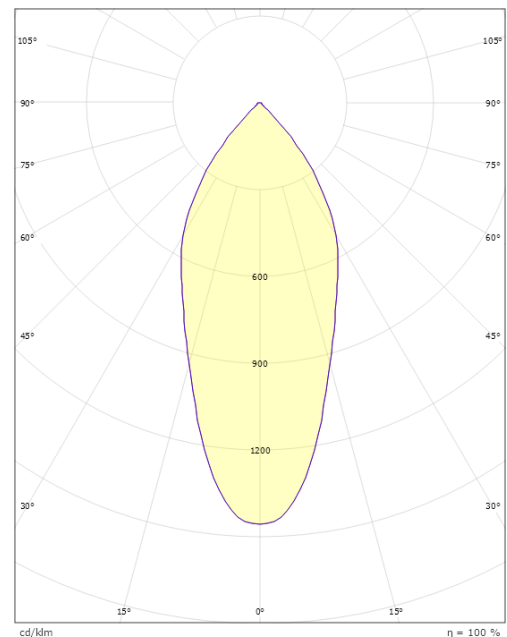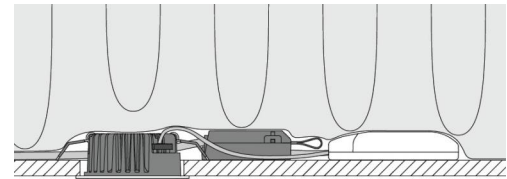

cd/klm  
— C0/C180  
— C90/C270



7 0 2 1 9 8 9 0 5 2 1 7 3