

# Junistar Lux IsoSafe



## Junistar Lux IsoSafe Black 580lm 2700K Ra 98 Trailing edge dimming

Article code: 902524  
EAN: 7021989025245  
Replaces: 902243



### Electrical

Wattage: 7W  
System wattage: 8W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

### Light technic

Type of light source: LED  
Luminous flux: 580lm  
Efficacy: 73 lm/W  
Colour temperature: 2700K  
Colour rendering (CRI): Ra 98  
MacAdams factor: SDCM: 1  
Lifetime: L90/B10>100,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 42°  
UGR: UGR<22

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II SELV  
IP Class: IP44

### Energy and approvals

Contains light source of energy class: F  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: Black (RAL 9004)  
Optics: Tempered glass

### Mounting/Connection



Mounting: Recessed, Indoor / Outdoor  
Connection: Screwless terminal block

### Dimensions

Height (mm) H: 56  
Diameter (mm) D: 94  
Cut-out (mm): 83  
Ceiling void depth (mm): 54  
Weight (kg) gross/net: 0.415 / 0.349

### Packaging

Packing dimensions (mm): 130 x 115 x 75

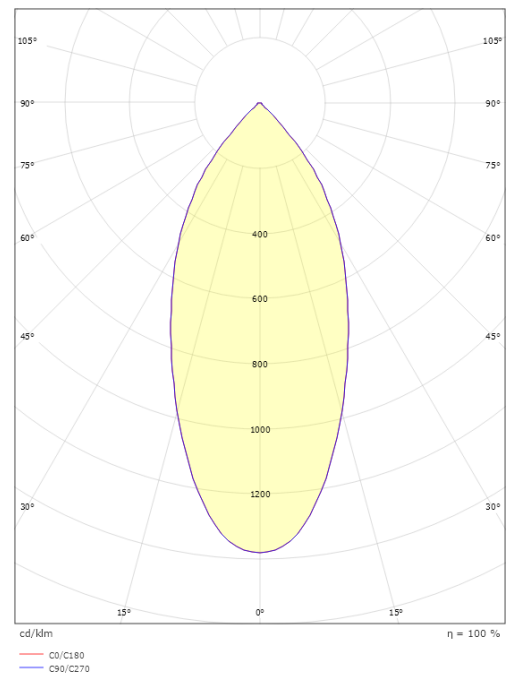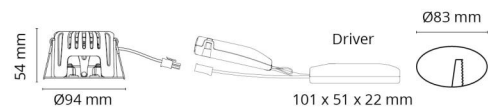

7 0 2 1 9 8 9 0 2 5 2 4 5