

Lineal recessed



Lineal recessed 1120 White 1970lm 4000K Ra>80 DALI / Push Dim

Article code: 8246095059
 EAN: 5703821180146



Electrical

System wattage: 17W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33
 Leakage current (mA): 0.29

Light technic

Type of light source: LED
 Luminous flux: 1970lm
 Efficacy: 116 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B10>100,000
 Lifetime: L93/>50,000
 Light distribution: Direct
 UGR: UGR<28
 Photobiological safety: RG 0

Control/Dimming

Type: DALI / Push Dim

Protection

Luminaire class: Class I

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: White (RAL 9003)

Mounting/Connection



Mounting: Recessed, Indoor
 Module: 1120
 Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions

Length (mm) L: 1121
 Width (mm) W: 62
 Height (mm) H: 62
 Weight (kg) gross/net: 2.4 / 2.2

Packaging

Packing dimensions (mm): 1225 x 71 x 64

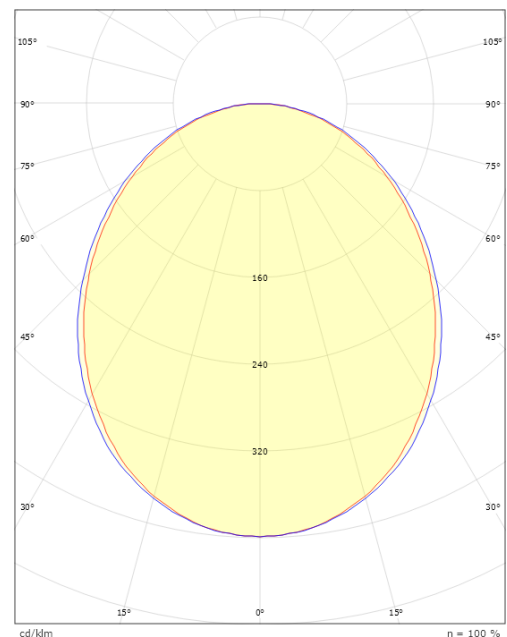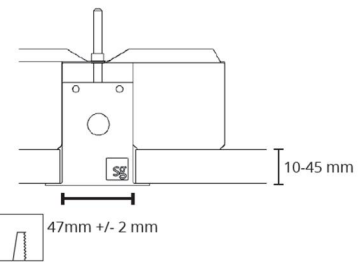

— C0/C180
 — C90/C270



5 7 0 3 8 2 1 1 8 0 1 4 6