

Lineal surface



Lineal surface 1120 Black 1740lm 3000K Ra>80 DALI / Push Dim

Article code: 8246095826
 EAN: 5703821180344



Electrical

System wattage: 17W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 25, C16: 41
 Leakage current (mA): 0.29

Light technic

Type of light source: LED
 Luminous flux: 1740lm
 Efficacy: 102 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B10>100,000
 Lifetime: L93/>50,000
 Light distribution: Direct
 UGR: UGR<26
 Photobiological safety: RG 0

Control/Dimming

Type: DALI / Push Dim

Protection

Luminaire class: Class I
 IK Class: IK08
 IP Class: IP20

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Black

Mounting/Connection


Mounting: Surface, Indoor
 Module: 1120
 Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions


Length (mm) L: 1121
 Width (mm) W: 42
 Height (mm) H: 70
 Weight (kg) gross/net: 2.8 / 2.6

Packaging

Packing dimensions (mm): 1275 x 50 x 80

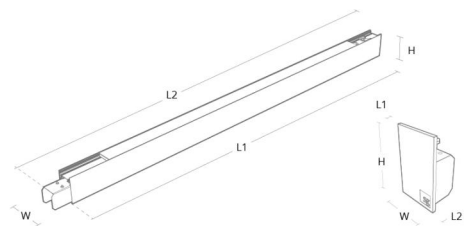

| Module | W | H | L1 | L2 |
|---------|----|----|------|------|
| 840mm | 42 | 70 | 841 | 891 |
| 1120mm | 42 | 70 | 1121 | 1171 |
| 1400mm | 42 | 70 | 1401 | 1451 |
| End cap | 42 | 70 | 3 | 28 |

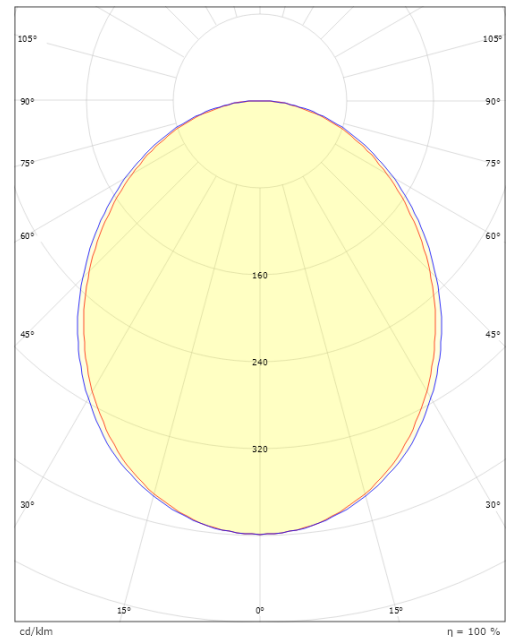

cd/km $\eta = 100\%$
 — C0/C180
 — C90/C270



5 7 0 3 8 2 1 1 8 0 3 4 4