

# Lineal suspended



## Lineal suspended 1400 White 4640lm 3000K Ra>80 DALI / Push Dim

Article code: 8246094704  
 EAN: 5703821178068



### Electrical

System wattage: 37W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33  
 Leakage current (mA): 0.29

### Light technic

Type of light source: LED  
 Luminous flux: 4640lm  
 Efficacy: 125 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B10>100,000  
 Lifetime: L93/>50,000  
 Light distribution: Direct/Indirect 50/50%  
 UGR: UGR<22  
 Photobiological safety: RG 1

### Control/Dimming

Type: DALI / Push Dim

### Protection

Luminaire class: Class I  
 IK Class: IK08  
 IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: White

### Mounting/Connection


Mounting: Suspended, Indoor  
 Module: 1400  
 Wire set: 1x2m wire kit w/ceiling bracket  
 Connection: 5-pole Winsta mini with 5x2,5mm<sup>2</sup> through wiring

### Dimensions


Length (mm) L: 1401  
 Width (mm) W: 42  
 Height (mm) H: 70  
 Weight (kg) gross/net: 3.5 / 3.3

### Packaging

Packing dimensions (mm): 1560 x 50 x 80

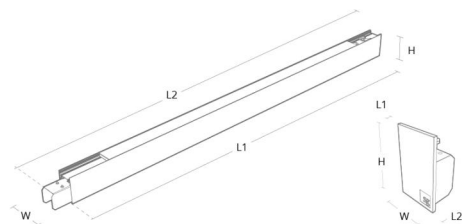

Module	W	H	L1	L2
840mm	42	70	841	891
1120mm	42	70	1121	1171
1400mm	42	70	1401	1451
End cap	42	70	3	28

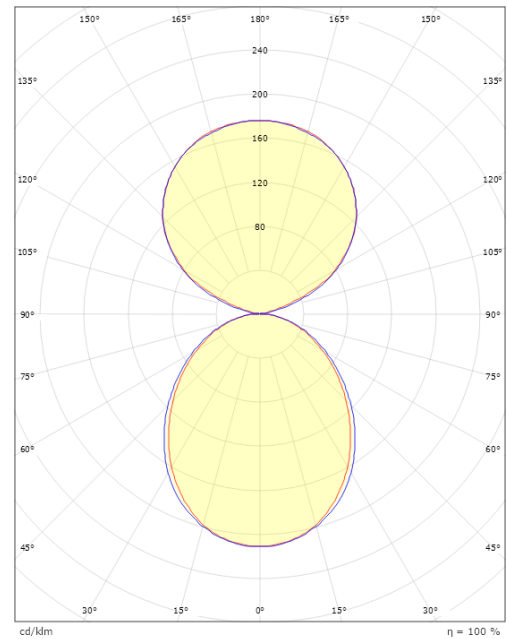

5 7 0 3 8 2 1 1 7 8 0 6 8