

# Prelude Square



## Prelude Square White w/ outlet 1400lm 2000-4000K Ra>80 Tunable White LEDDim

Article code: 111394  
EAN: 7021981113940



### Electrical

System wattage: 12W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 74, B16: 118, C10: 74, C16: 118

### Light technic

Type of light source: LED  
Luminous flux: 1400lm  
Efficacy: 117 lm/W  
Colour temperature: 2000-4000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B50>100,000  
Light distribution: Direct  
Optic: Acrylic diffuser  
Photobiological safety: RG 0

### Control/Dimming

Type: Tunable White LEDDim

### Protection

Luminaire class: Class I  
IK Class: IK05  
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)  
Optics: Acrylic (PMMA)

### Mounting/Connection


Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Width (mm) W: 590  
Height (mm) H: 59  
Depth (D): 62  
Weight (kg) gross/net: 1.16 / 1.16

### Packaging

Packing dimensions (mm): 598 x 65 x 65

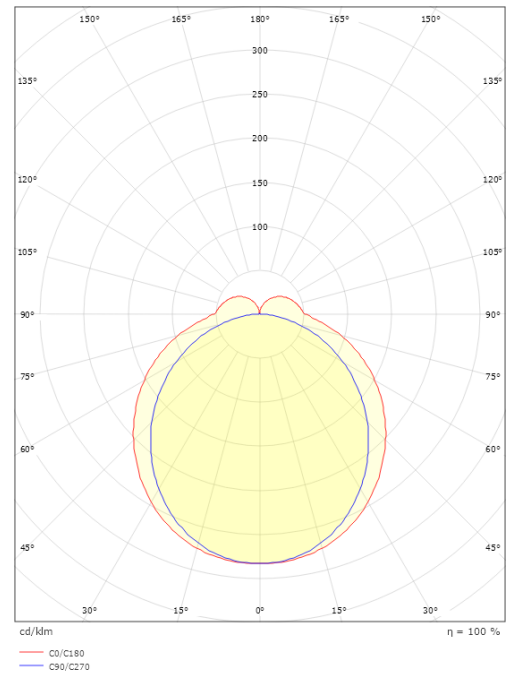

7 0 2 1 9 8 1 1 1 3 9 4 0