

Prelude Square



Prelude Square Black w/ outlet 1370lm 2000-4000K Ra>80 Tunable White LEDDim

Article code: 111396
EAN: 7021981113964



Electrical

System wattage: 12W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 74, B16: 118, C10: 74, C16: 118

Light technic

Type of light source: LED
Luminous flux: 1370lm
Efficacy: 114 lm/W
Colour temperature: 2000-4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B50>100,000
Light distribution: Direct
Optic: Acrylic diffuser
Photobiological safety: RG 0

Control/Dimming

Type: Tunable White LEDDim

Protection

Luminaire class: Class I
IK Class: IK05
IP Class: IP44 (mounted horizontally) / IP40 (mounted vertically)

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 590
Height (mm) H: 59
Depth (D): 62
Weight (kg) gross/net: 1.16 / 1.16

Packaging

Packing dimensions (mm): 598 x 65 x 65

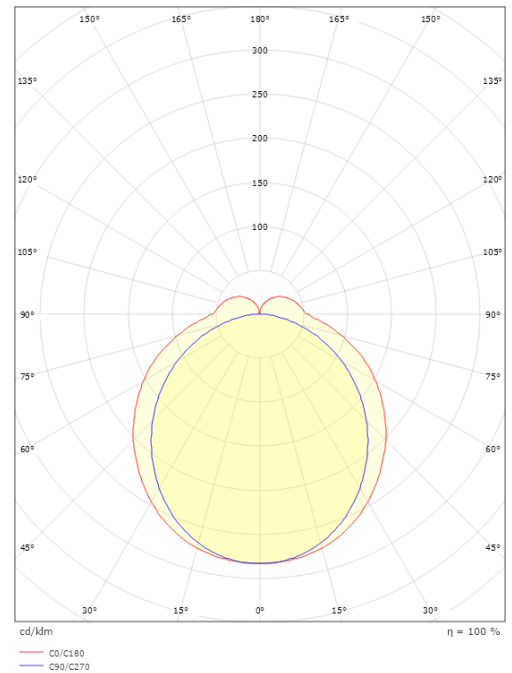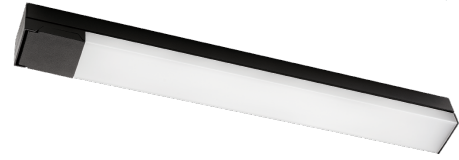

7 0 2 1 9 8 1 1 1 3 9 6 4