

# Rax Soft 150



## Rax Soft 150 Satin TW LEDDim 2700-6500K Ra>80 Tunable White LEDDim

Article code: 212574  
EAN: 7021982125744



### Electrical

System wattage: 28W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 20, B16: 32, C10: 20, C16: 32

### Light technic

Type of light source: LED  
Luminous flux: 2600lm (@6500K)  
Emergency lumen: EM 280lm  
Efficacy: 93 lm/W  
Colour temperature: 2700-6500K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>100,000  
Light distribution: Direct  
Optic: Satin Matt Reflector  
Beam angle: 68°  
Photobiological safety: RG 1



### Control/Dimming

Type: Tunable White LEDDim

### Protection

Luminaire class: Class II SELV  
IK Class: IK08  
IP Class: IP44/IP20

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes

### Materials and finish

Housing: Flame retardant polycarbonate  
Colour: White/Satin mat  
Optics: Polycarbonat (PC)

### Mounting/Connection


Mounting: Recessed, Indoor  
Connection: 3 pol Linect / screwless terminal block

### Dimensions

Height (mm) H: 83  
Diameter (mm) D: 166  
Cut-out (mm): 150  
Ceiling void depth (mm): 80  
Weight (kg) gross/net: 0.916 / 0.77

### Packaging

Packing dimensions (mm): 190 x 190 x 95

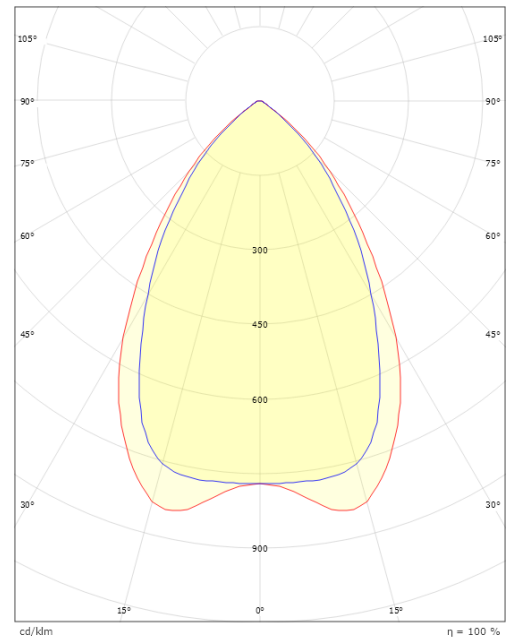

7 0 2 1 9 8 2 1 2 5 7 4 4