

Soft IsoSafe DimToWarm



Soft IsoSafe DimToWarm White 550lm 2000-2800K Ra 98 DALI

Article code: 903231
EAN: 7021989032311



Electrical

Wattage: 7W
System wattage: 8W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED
Luminous flux: 550lm
Efficacy: 69 lm/W
Colour temperature: 2000-2800K
Colour rendering (CRI): Ra 98
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Glass Clear
Beam angle: 42°
UGR: UGR<19

Control/Dimming

Type: DALI

Protection

Luminaire class: Class II
IP Class: IP54

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Matte white (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Connection: 5 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 53
Diameter (mm) D: 94
Cut-out (mm): 83
Ceiling void depth (mm): 51
Distance to flammable materials: 0mm
Weight (kg) gross/net: 0.7 / 0.58

Packaging

Packing dimensions (mm): 110 x 110 x 110

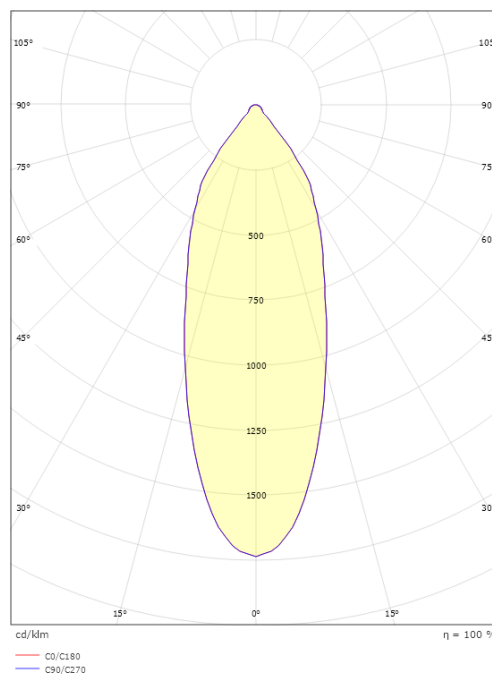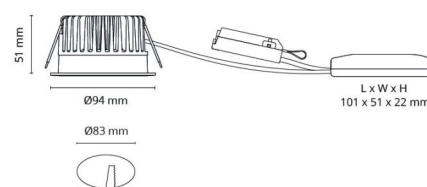

7 0 2 1 9 8 9 0 3 2 3 1 1