

Spike Black Uplight w/ outlet 930lm 3000K Ra>80 Trailing edge dimming

Article code: 614914
 EAN: 7021986149142




Electrical

Wattage: 10W+6W
 System wattage: 16W
 Voltage: 220-240V

Light technic

Type of light source: LED
 Socket: GU10
 Light source included: Yes
 Luminous flux: 930lm
 Efficacy: 58 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B50>50,000
 Light distribution: Direct
 Optic: Plastic opal/transparent
 Beam angle: 95° down / 15° up



Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I
 IK Class: IK08
 IP Class: IP44

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Black (RAL 9004)
 Optics: UV-stabilized polycarbonate/ UV-stabilized PMMA



Mounting/Connection


Mounting: Surface, Outdoor
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 180
 Width (mm) W: 171
 Height (mm) H: 173
 Depth (D): 155
 Weight (kg) gross/net: 2.028 / 1.74

Packaging

Packing dimensions (mm): 180 x 165 x 185

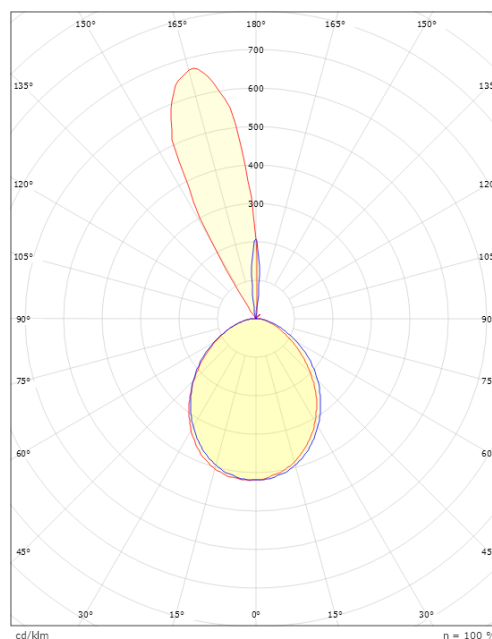

cd/kdm
 C0/C180
 C90/C270

η = 100 %



7 0 2 1 9 8 6 1 4 9 1 4 2