

UniLED IsoSafe Airtight



UniLED IsoSafe Airtight White 710lm 4000K Ra 98 Trailing edge dimming

Article code: 904421
 EAN: 7021989044215



Electrical

Wattage: 7W
 System wattage: 8.5W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
 Luminous flux: 710lm
 Efficacy: 84 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>100,000
 Light distribution: Direct Reflector
 Optic: Reflector
 Beam angle: 42°

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV
 IP Class: IP20/IP65

Energy and approvals

Contains light source of energy class: F
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 37
 Diameter (mm) D: 94
 Cut-out (mm): 76
 Ceiling void depth (mm): 35
 Distance to flammable materials: 0mm
 Weight (kg) gross/net: 0.48 / 0.4

Packaging

Packing dimensions (mm): 115 x 100 x 95

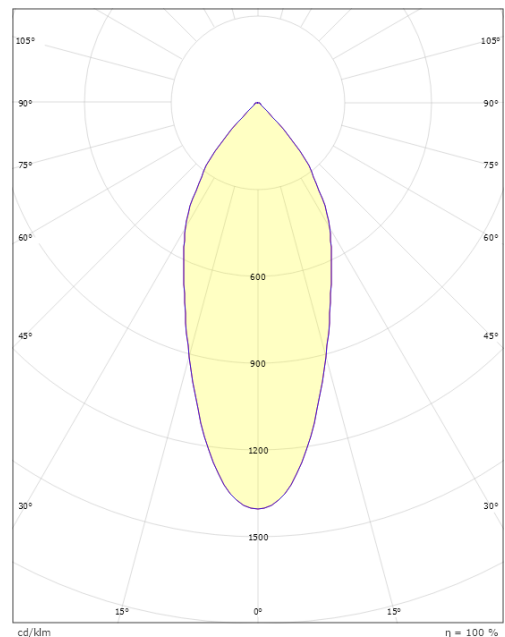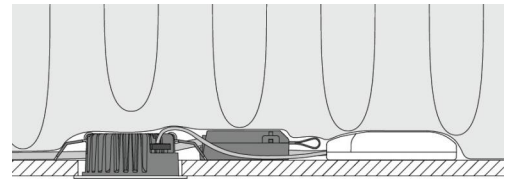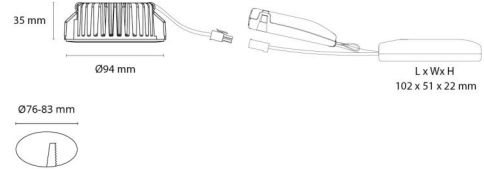

cd/klm

$\eta = 100\%$

— C0/C180
 — C90/C270



7 0 2 1 9 8 9 0 4 4 2 1 5