

# Zip Tube Micro



## Zip Tube Micro White DimToWarm 340lm 2000-2800K Ra>95 Trailing edge dimming

Article code: 320603  
 EAN: 7021983206039



### Electrical

System wattage: 7W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 180, B16: 290, C10: 180, C16: 290

### Light technic

Type of light source: LED  
 Luminous flux: 340lm  
 Efficacy: 49 lm/W  
 Colour temperature: 2000-2800K  
 Colour rendering (CRI): Ra>95  
 MacAdams factor: SDCM: 3  
 Lifetime: L90/B10>50,000  
 Light distribution: Direct  
 Optic: Reflector medium  
 Beam angle: 40°  
 UGR: UGR<19

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II  
 IP Class: IP20

### Energy and approvals

Contains light source of energy class: F  
 Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
 Colour: White (RAL 9003)  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection




Mounting: Surface, Indoor  
 Connection: Zip track (adapter included)

### Dimensions

Length (mm) L: 135  
 Width (mm) W: 39  
 Height (mm) H: 135  
 Weight (kg) gross/net: 0.3 / 0.25

### Packaging

Packing dimensions (mm): 135 x 39 x 135

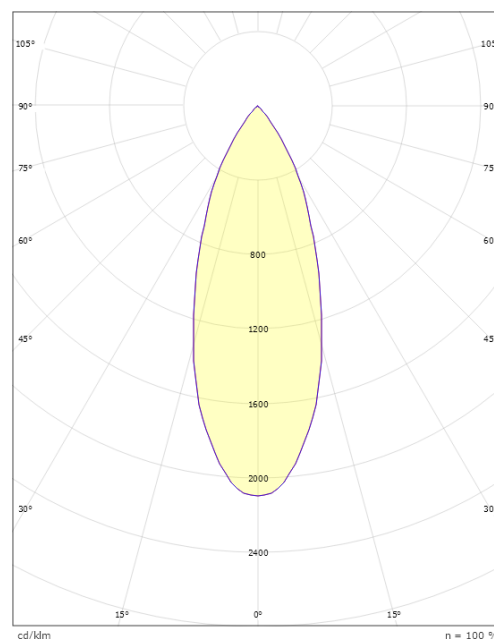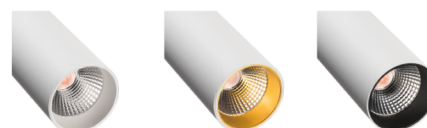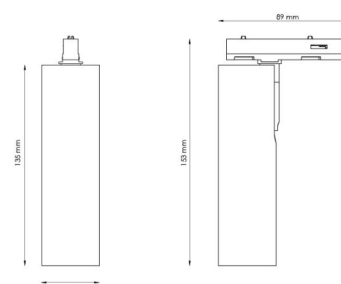

7 0 2 1 9 8 3 2 0 6 0 3 9