

Zip Tube Micro



Zip Tube Micro Black DimToWarm 340lm 2000-2800K Ra>95 Trailing edge dimming

Article code: 320607
EAN: 7021983206077



Electrical

System wattage: 7W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 180, B16: 290, C10: 180, C16: 290

Light technic

Type of light source: LED
Luminous flux: 340lm
Efficacy: 49 lm/W
Colour temperature: 2000-2800K
Colour rendering (CRI): Ra>95
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Reflector medium
Beam angle: 40°
UGR: UGR<19
Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: UV-stabilized polycarbonate

Mounting/Connection




Mounting: Surface, Indoor
Connection: Zip track (adapter included)

Dimensions

Length (mm) L: 135
Width (mm) W: 39
Height (mm) H: 135
Weight (kg) gross/net: 0.3 / 0.25

Packaging

Packing dimensions (mm): 135 x 39 x 135

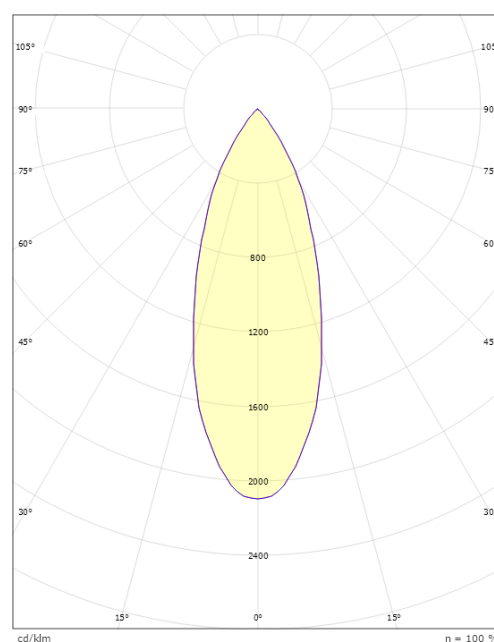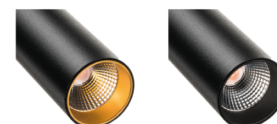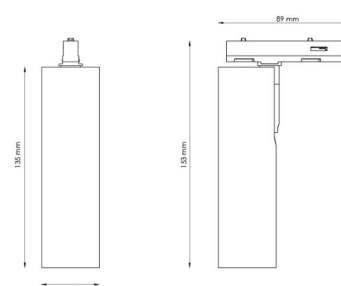

cd/km

$\eta = 100\%$

— C0/C180
— C90/C270



7 0 2 1 9 8 3 2 0 6 0 7 7