





Attractive downlight for indoor use with 30-degree 360-degree stepless tilt. Well integrated LED chip and dimmable Phase cut-off or DALI driver. Made of die-cast powder-coated aluminium or brushed steel, glass diffuser. 42-degree beam angle via reflector. Low recessed downlight with hole size Ø83mm. Tool-free mounting in mounting box for direct 230V with loopable quick clips and automatic strain relief. IP44, KL III with dedicated circuit.

Product- and environment images

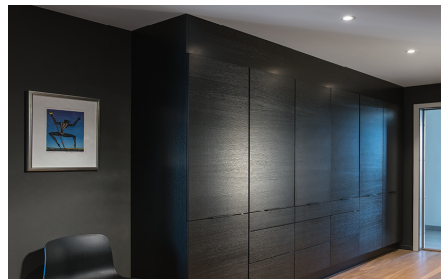

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
Brushed steel				
 902402 Junistar Brushed steel 630lm 4000K Ra>95 Trailing edge dimming 7.3W LED 86 lm/W SDCM:2 L90/B10>50,000, L80/B20>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP44	Trailing edge dimming	Recessed, Indoor Screwless terminal block	Ø94 x H50