

# Herning Wall



## Herning Wall Grå Midi 1060/1140/1770/1920lm 3000/4000K Ra>80 Bagkantsdæmp

EAN: 7021986239638  
SG varenr.: 623963



### Elektrisk

Wattage: 13W/25W  
Spænding: 220-240V  
Frekvens (Hz): 50/60Hz  
Maks. antal armaturer pr. afbryder: B10: 23, B16: 36, C10: 37, C16: 60

### Lysteknik

Lyskilde: LED  
Lumen output: 1060/1140/1770/1920lm  
Effekt: 82/88/71/77lm/W  
Farvetemperatur: 3000/4000K  
Farvegengivelse (CRI): Ra>80  
MacAdams faktor: SDCM: 3  
Levetid: L80/B20>50.000  
Lysfordeling: Direkte  
Optik: Glas  
UGR: UGR<25  
Fotobiologisk sikkerhed: RG 1

### Dimmertype

Type: Bagkantsdæmp

### Beskyttelse

Isolationsklasse: Klasse II

### Materialer og overflader

Materiale: Aluminium  
Farve: Grå RAL 7042

### Montering/Tilslutning



Montering: Væg, Interiør / Udendørs  
Tilslutning: Klemmerække  
Vindprojekteret areal: 0,0435m<sup>2</sup>

### Dimensioner

Længde (mm) L: 402  
Bredde (mm) W: 240  
Højde (mm) H: 222  
Vægt (kg) brutto/netto: 3.354 / 2.62

### Forpakning

Forpakkingsstørrelse (mm): 420 x 250 x 240

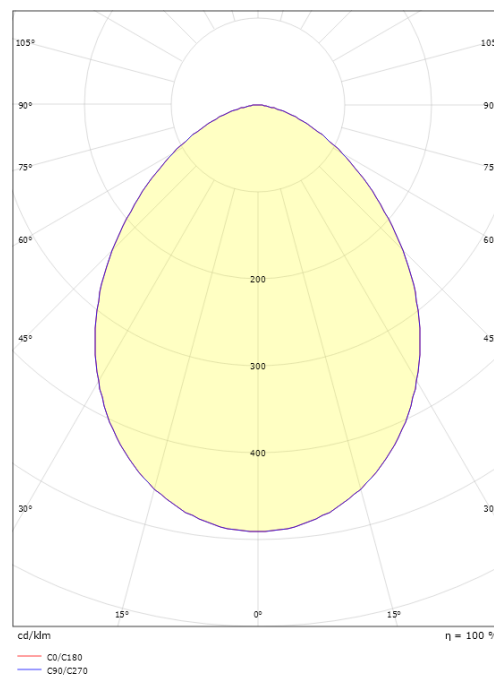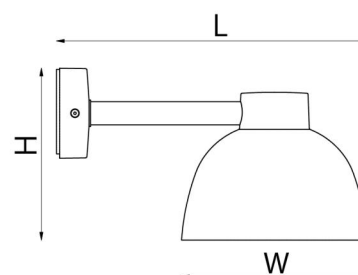

7 0 2 1 9 8 6 2 3 9 6 3 8