

Inspire White 4300lm 4000K Ra>80 DALI / Push Dim

Article code: 212083
 EAN: 7021982120831



Electrical

System wattage: 34W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 8, B16: 13, C10: 12, C16: 20
 Leakage current (mA): 0.29

Light technic

Type of light source: LED
 Luminous flux: 4300lm
 Efficacy: 126 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>100,000
 Lifetime: L90>50,000
 Light distribution: Direct/Indirect 50/50%
 Optic: Cubic Optic Black
 UGR: UGR<10
 Photobiological safety: RG 1

Control/Dimming

Type: DALI / Push Dim

Protection

Luminaire class: Class I
 IP Class: IP20

Energy and approvals

Contains light source of energy class: D
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: White
 Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Suspended, Indoor
 Wire set: 2x2m wire kit
 Cable: Cable 5x0,75mm² 2,5m

Dimensions

Length (mm) L: 1241
 Width (mm) W: 38
 Height (mm) H: 67
 Weight (kg) gross/net: 3.1 / 2.7

Packaging

Packing dimensions (mm): 1345 x 125 x 88

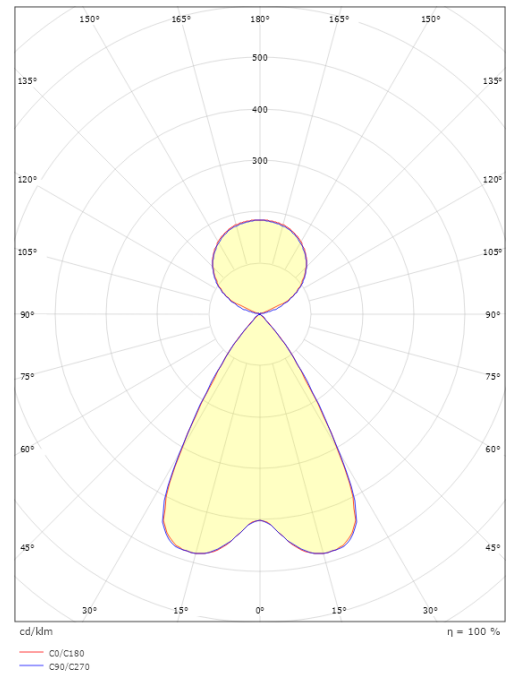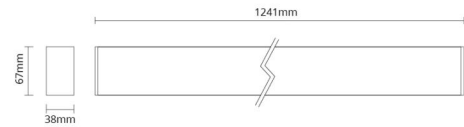

7 0 2 1 9 8 2 1 2 0 8 3 1