

## Inspire Black 4140lm 3000K Ra>80 DALI / Push Dim

Article code: 212087  
 EAN: 7021982120879



### Electrical

System wattage: 34W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 8, B16: 13, C10: 12, C16: 20  
 Leakage current (mA): 0.29

### Light technic

Type of light source: LED  
 Luminous flux: 4140lm  
 Efficacy: 122 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B20>100,000  
 Lifetime: L90>50,000  
 Light distribution: Direct/Indirect 50/50%  
 Optic: Cubic Optic Black  
 UGR: UGR<10  
 Photobiological safety: RG 1

### Control/Dimming

Type: DALI / Push Dim

### Protection

Luminaire class: Class I  
 IP Class: IP20

### Energy and approvals

Contains light source of energy class: D  
 Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
 Colour: Black (RAL 9004)  
 Optics: Polycarbonat (PC)

### Mounting/Connection




Mounting: Suspended, Indoor  
 Wire set: 2x2m wire kit  
 Cable: Cable 5x0,75mm<sup>2</sup> 2,5m

### Dimensions

Length (mm) L: 1241  
 Width (mm) W: 38  
 Height (mm) H: 67  
 Weight (kg) gross/net: 3.171 / 2.5

### Packaging

Packing dimensions (mm): 1365 x 90 x 61

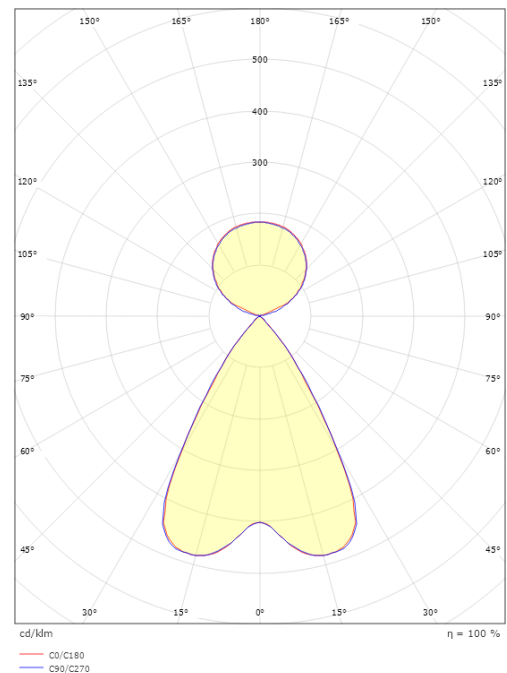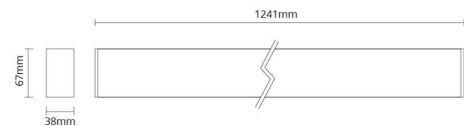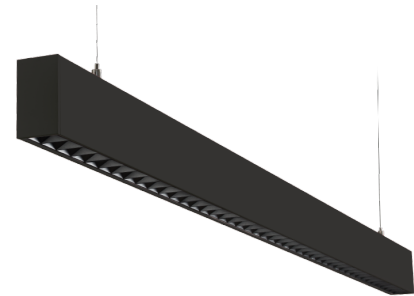

7 0 2 1 9 8 2 1 2 0 8 7 9